

EN



AREALIFT®
ITALIAN PLATFORM LIFTS



domoSTEP

platform for small drops



MADE IN ITALY

domoSTEP - configuration example

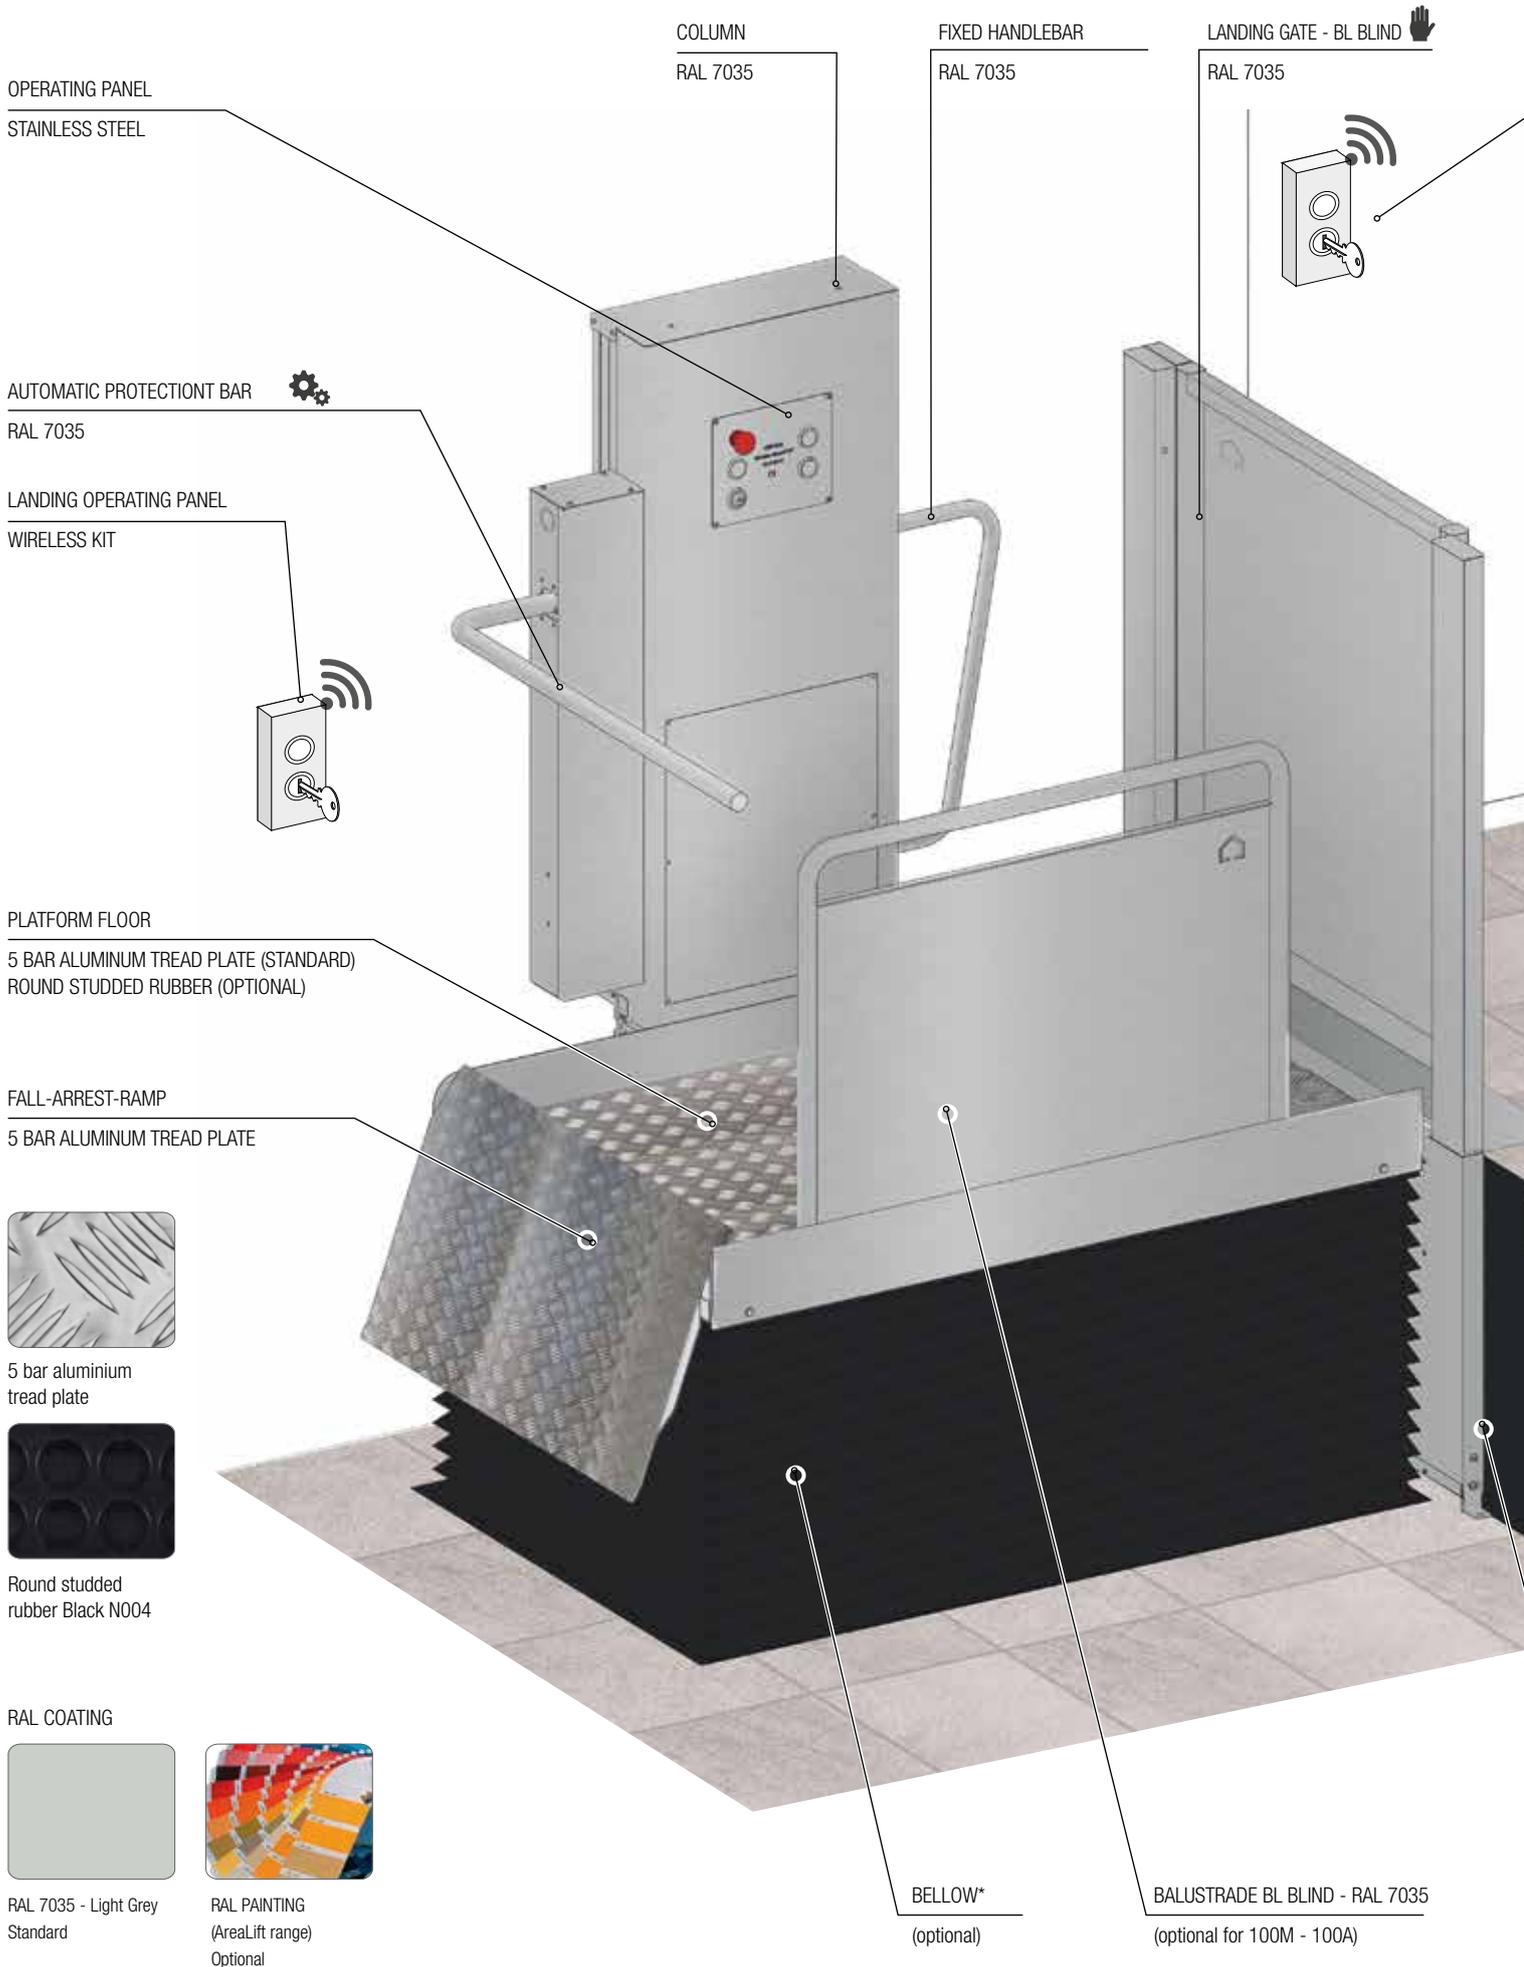

5 bar aluminium
tread plate



Round studded
rubber Black N004


RAL COATING



RAL 7035 - Light Grey
Standard



RAL PAINTING
(AreaLift range)
Optional

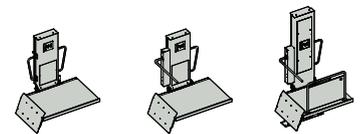

LANDING OPERATING PANEL

WIRELESS KIT



	dS 100M	dS100A	dS 160A
MAX TRAVEL			
1000 mm	■	■	—
1600 mm	—	—	■
POWER SUPPLY AND CONSUMPTION			
Single phase power supply 230 Vac	■	■	■
Stand-by power consumption 6W	■	■	■
Regular use power consumption 46W	■	■	■
PLATFORM OPERATING PANEL			
Standard with n° 5 buttons	■	■	■
WIRELESS OPERATING PANELS (2 pieces)			
N° 1 button	□	□	□
N° 1 hold-to-run key	□	□	□
N° 1 button + 1 key switch 2P/2E	□	□	□
PLATFORM			
Standard dimensions 900x1250 or 900x1400 mm	■	■	■
Customized dimensions (within max limits: 900x1400 mm)	□	□	□
5 Bar Aluminum tread plate floor	■	■	■
Round Studded Rubber BLACK floor	□	□	□
BALUSTRADE			
BL Blind (painted RAL 7035 Light Grey)	□	□	■
BL Blind (painted RAL in AreaLift range)	□	□	□
LANDING GATE			
BL Blind (painted RAL 7035 Light Grey)	□	□	■
BL Blind (painted RAL in AreaLift range)	□	□	□
GL Glazed	□	□	□
⚙️ Motorized gate opening system	□	□	□
PROTECTION BELLOW (pit required)*			
85 mm pit	□	□	—
180 mm pit	—	—	□
ANTI-SHEARING WALL			
Painted RAL 7035 Light Grey	□	□	□
Painted RAL (AreaLift range)	□	□	□
PROTECTION BAR AND HANDLEBARS			
1 side fixed handlebar	—	■	■
2 sides fixed handlebar	■	—	—
Automatic fall-prevent bar	—	■	■
FINISHES (PLATFORM, COLUMN AND ACCESSORIES)			
Painted RAL 7035 Light Grey	■	■	■
Painted RAL AreaLift range	□	□	□
SAFETY			
Emergency STOP	■	■	■
Descent to landing in case of black out	■	■	■
Lower sensitive surface (without bellows)	■	■	■
Inside battery for powerless operation	■	■	■
EXTRA VERSION			
☁️ OUTDOOR - AISI 316 stainless steel	□	□	□
☁️ OUTDOOR - Electric and Mechanical protection	□	□	□

ANTI-SHEARING WALL

(optional)

■ Standard □ Optional — Not available

* In compliance with the current directive.



domoSTEP 100M



SUGGESTED USE



DUTY LOAD



STAND-BY POWER CONSUMPTION




IN-USE POWER CONSUMPTION

domoSTEP 100M is the ideal solution to overcome steps and obstacles up to one meter in complete safety. It is designed for people with reduced mobility, but still able to walk with or without aids.

Safety, versatility and reliability, diminished overall dimensions and quick installation are **domoSTEP 100M** strengths.

The platform, in compliance with DM 2006-42-CE, does not need any masonry work; it is battery-powered and does not require any fixed wiring, since a standard socket is enough.

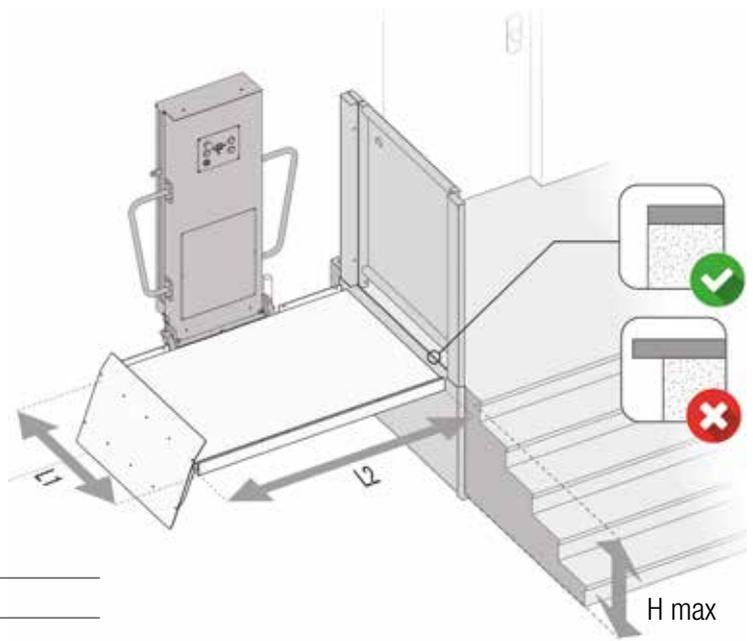

Maximum travel (H max):	1000 mm
Traction:	Hydraulic
Operation:	Hold to Run
Speed:	5 cm per second
Power supply:	Single-phase power supply 230 Vac
Stand-by power consumption*:	6 W
In-use power consumption*:	46W
Cycles /hour:	Max 10 (with 250 kg load)
Batteries:	2 x 12Vdc 7Ah
Power Unit:	Embedded in the column
Platform:	Manually foldable
Platform dimensions (L1xL2)**:	900x1250 or 900x1400 mm
Remote control:	Included (2 pcs)
Fixing (travel ≤ 0,5 m):	Floor fixing
Fixing (travel ≤ 1,0 m):	Floor and wall fixings
Packaging:	Wooden Cage




* Power consumption from the electrical network supply


** Customized dimensions (on demand)

domoSTEP 100M/100A - TECHNICAL DATA


STANDARD VERSION

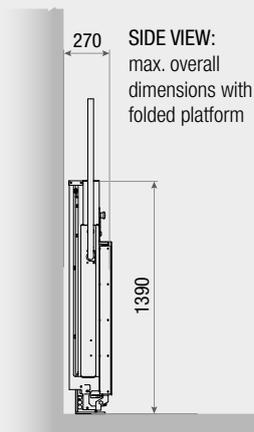

SIDE VIEW:
max. overall dimensions with folded platform

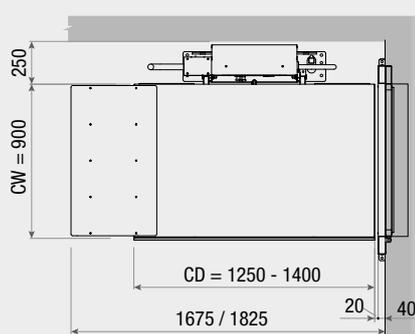

TOP VIEW:
max overall dimensions with unfolded platform

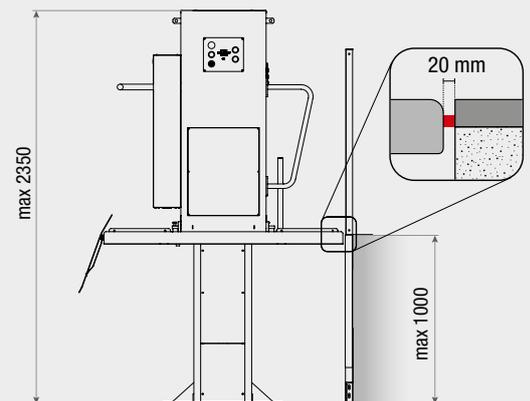

FRONT VIEW:
overall height at max extension



domoSTEP 100A



SUGGESTED USE



DUTY LOAD



STAND-BY POWER CONSUMPTION




IN-USE POWER CONSUMPTION

domoSTEP 100A is the ideal solution to overcome architectural barriers up to one meter in complete safety. It is designed for people with reduced mobility and using a wheelchair, with or without an accompanying person.

Safety, versatility and reliability, diminished overall dimensions and quick installation are **domoSTEP 100A** strengths.

The platform, in compliance with DM 2006-42-CE, does not need any masonry work; it is battery-powered and does not require any fixed wiring, since a standard socket is enough.

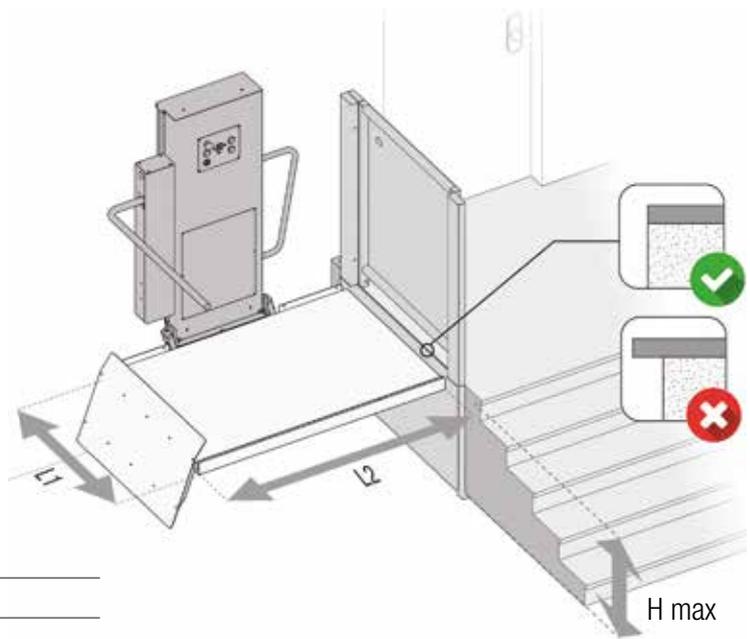


Maximum travel (H max):	1000 mm
Traction:	Hydraulic
Operation:	Hold to Run
Speed:	5 cm per second
Power supply:	Single-phase power supply 230 Vac
Stand-by power consumption*:	6 W
In-use power consumption*:	46W
Cycles /hour:	Max 10 (with 250 kg load)
Batteries:	2 x 12Vdc 7Ah
Power Unit:	Embedded in the column
Platform:	Manually foldable
Platform dimensions (L1xL2)**:	900x1250 or 900x1400 mm
Remote control:	Included (2 pcs)
Fixing (travel ≤ 0,5 m):	Floor fixing
Fixing (travel ≤ 1,0 m):	Floor and wall fixings
Packaging:	Wooden Cage

* Power consumption from the electrical network supply


** Customized dimensions (on demand)



BELLOW VERSION (OPTIONAL)

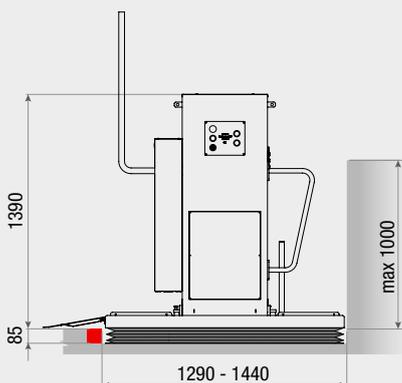

FRONT VIEW:
overall dimensions with closed bellow

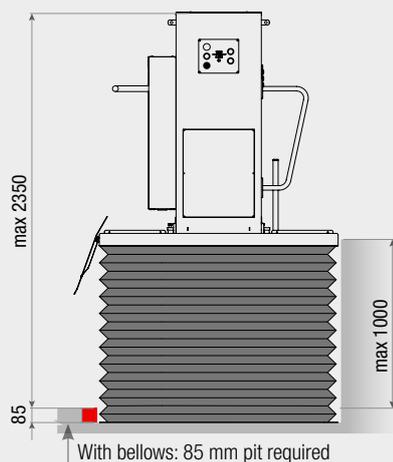

FRONT VIEW:
overall height at the top level with bellow





domoSTEP 160A



SUGGESTED USE



DUTY LOAD




STAND-BY POWER CONSUMPTION



IN-USE POWER CONSUMPTION

domoSTEP 160A is the innovative solution, specifically designed to overcome architectural barriers up to 1.6 meters in complete safety. It is designed for people with reduced mobility and using a wheelchair, with or without an accompanying person. Safety, versatility and reliability, diminished overall dimensions and quick installation are **domoSTEP 160A's** strengths. The platform, in compliance with DM 2006-42-CE, does not need any masonry work, it is battery-powered and does not require any fixed wiring, since a standard socket is enough.

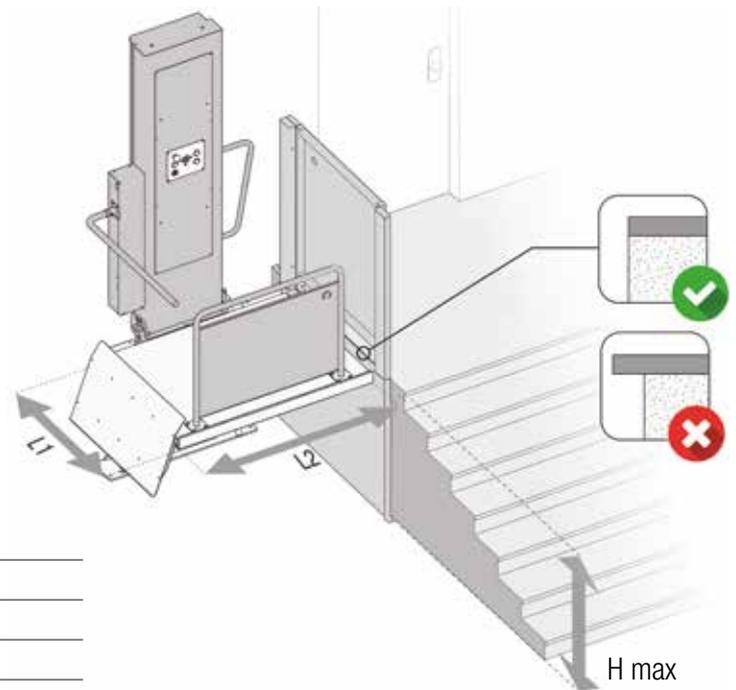



Maximum travel (H max):	1600 mm
Traction:	Hydraulic
Operation:	Hold to Run
Speed:	5 cm per second
Power supply:	Single-phase power supply 230 Vac
Stand-by power consumption*:	6 W
In-use power consumption*:	46W
Cycles /hour:	Max 10 (with 250 kg load)
Batteries:	2 x 12Vdc 7Ah
Power Unit:	Embedded in the column
Platform:	Fixed (with balaustrade included)
Platform dimensions (L1xL2)**:	900x1250 or 900x1400 mm
Remote control:	Included (2 pcs)
Fixing:	Floor and wall fixings
Packaging:	Wooden Cage

* Power consumption from the electrical network supply

** Customized dimensions (on demand)


domoSTEP 160A

BELLOW VERSION (OPTIONAL)

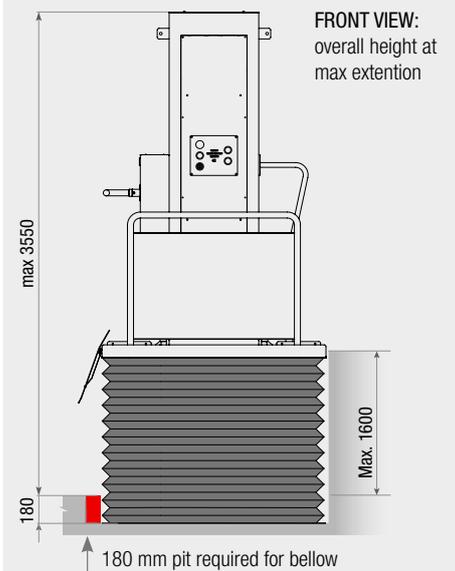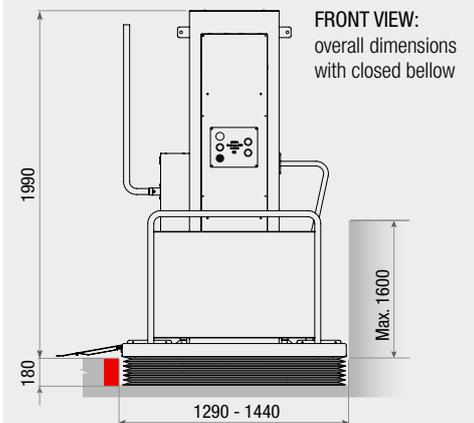


domoSTEP 160A - TECHNICAL DATA

STANDARD VERSION

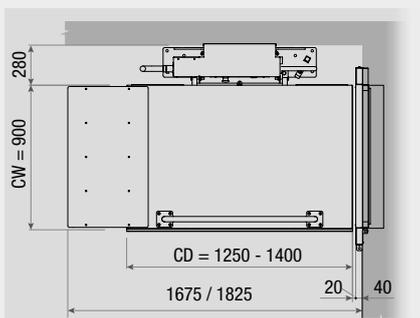

TOP VIEW:
max overall dimensions with unfolded platform

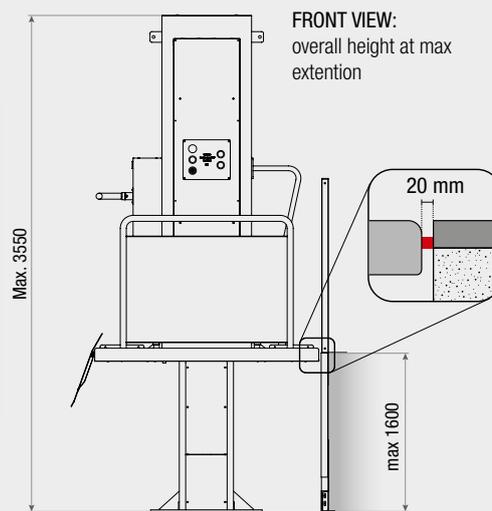





AREALIFT®
ITALIAN PLATFORM LIFTS

AREALIFT S.r.l.

Via Caduti del Lavoro, 22
43058 - Bogolese di Sorbolo
Parma, Italy
Tel. +39 0521.695369
www.arelift.com

Authorized reseller:

MADE IN ITALY